




Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 213 939 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:  
12.06.2002 Bulletin 2002/24

(51) Int Cl.<sup>7</sup>: H04Q 7/38

(21) Application number: 00126969.5

(22) Date of filing: 08.12.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Li, Zhu  
c/o Nokia (China) Investment Co.Ltd.  
Beijing, 100013 (CN)

(74) Representative: Becker Kurig Straus  
Patentanwälte  
Bavariastrasse 7  
80336 München (DE)

(71) Applicant: Nokia Corporation  
02150 Espoo (FI)

(54) Communication system having implemented point-to-multipoint-multicast function

(57) The present invention refers to a communication system having a network (1) and a plurality of user terminals (2,3,4) that are coupled to the network via a communication channel using wireless radio frequency transmission and having a downlink channel for transmitting messages in the direction from the network to the user terminals wherein the downlink channel comprises a paging channel for transmission of paging messages in paging frames for initiating communication with a user terminal allocated to a paging group of a plurality of user terminals, and a paging indicator channel for transmission of a paging indicator belonging to the paging group when there is a paging message for the user terminal belonging to the paging group, wherein the user terminal processes the next paging frame transmitted on the paging channel to see whether there is a paging message intended for it when the paging indicator has been transmitted on the paging indicator channel, and wherein the paging message on the paging channel comprises a point-to-multipointmulticast (PTM-M) group identifier to identify a PTM-M group.

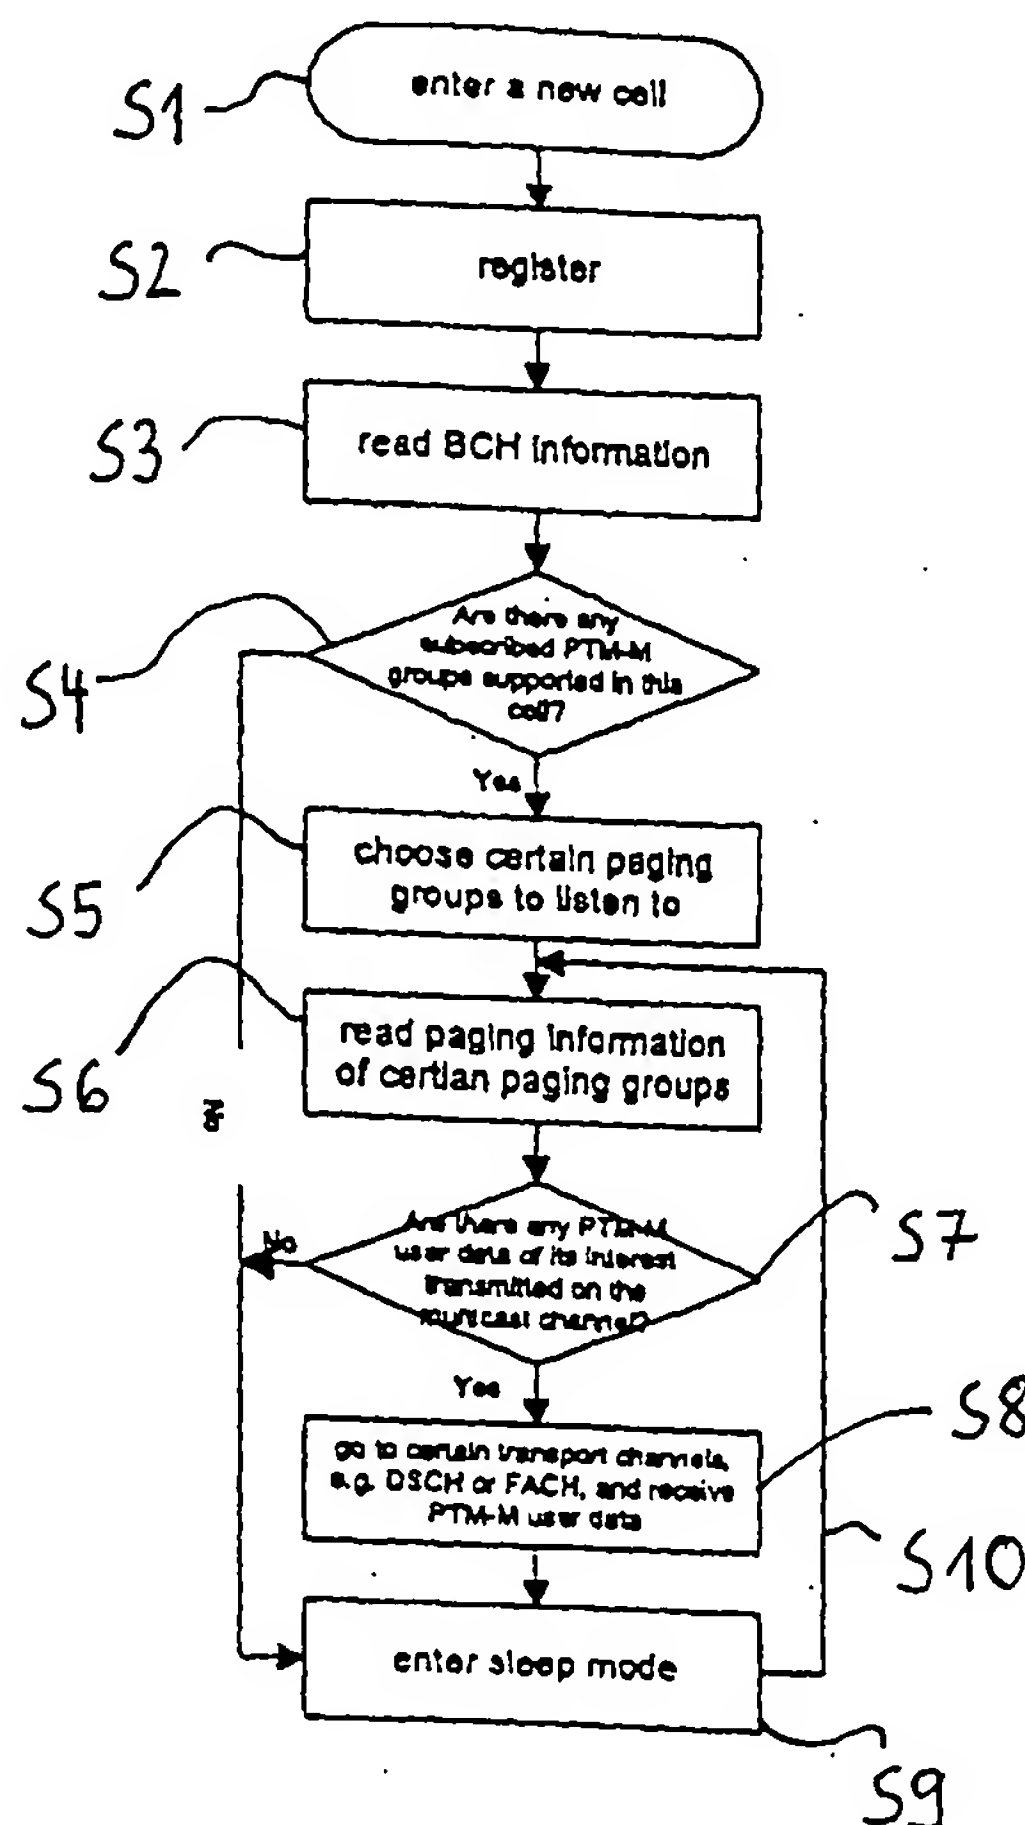


FIG. 3

EP 1 213 939 A1

## Description

**[0001]** The present invention refers to a communication system comprising a network and a plurality of user terminals that are coupled to the network via a communication channel using wireless radio frequency transmission and having a downlink channel for transmitting messages in the direction from the network to the user terminals. Further, the invention relates to a network and a user terminal, both for use in said communication system.

**[0002]** Recently, mobile telephone communication networks and systems have become very popular, for example, the telephone network corresponding to the Global Mobile Satellite (GMS) standards. The GMS systems supports the usual mobile telephone communication and, in addition, a number of further services, e.g. the short message service (SMS) cell broadcast and the point to multipoint multicast (= PTM-M) service in the general packet radio system.

**[0003]** The PTM-M service is a service in which the message is transmitted to all subscribers currently located within a geographical area. The message contains a group identifier indicating whether the message is of interest to all subscribers or to only a subset of subscribers or user terminals, e.g. certain mobile telephones also called mobile stations belonging to a specific PTM group. The PTM-M service is a connectless unidirectional service, i.e. in the downlink direction from the network to the user terminal, and is a variable bit rate service.

**[0004]** The object of the present invention is the implementation of the PTM-M service in communication systems, e.g. the Universal Mobile Telecommunication System (UMTS), of the latest generation.

**[0005]** This object is solved by a communication system according to claim 1 and by a method for its operation according to claim 14. Accordingly, the communication system of the invention comprises a network and a plurality of user terminals that are coupled to the network via a communication channel using wireless radio frequency transmission and having a downlink channel for transmitting messages in the direction from the network to the user terminals, wherein the downlink channel comprises:

a paging channel for transmission of paging messages in paging frames for initiating communication with a user terminal allocated to a paging group of a plurality of user terminals, and a paging indicator channel for transmission of a paging indicator belonging to the paging group when there is a paging message for the user terminal belonging to the paging group, wherein the user terminal processes the next paging frame transmitted on the paging channel to determine whether there is a paging message intended for it when the paging indicator has been transmitted on the paging indicator channel, and

wherein the paging message on the paging channel comprises a point-to-multipoint-multicast (PTM-M) group identifier to identify a PTM-M group.

**[0006]** A considerable advantage of the present invention is the implementation of the PTM-M service in the communication system, for instance, the UMTS without the requirement of additional channels or downlink transport channels. This is achieved by using a paging channel, a paging indicator channel and a downlink transport channel already provided by the communication system. These channels are destined to implement the PTM-M service in the communication system. Thereby a substantial increase of the system complexity in the e.g. UMTS is avoided when the PTM-M service is getting implemented.

**[0007]** Preferably, the paging channel itself is used to transport the PTM-M messages, wherein the paging message on the paging channel comprises one or a plurality of PTM-M messages being intended for the PTM-M group identified by means of the PTM-M group identifier. The paging channel may be the secondary common control physical channel (S-CCPCH) of the UMTS.

**[0008]** In an alternative embodiment, the downlink channel may comprise in addition a downlink transport channel shared by several user terminals and allocated for transporting PTM-M messages, wherein the user terminal accesses the PTM-M messages of the downlink transport channel when, in the paging channel, the user terminal has detected a PTM-M identifier of a PTM-M group to which the user terminal is allocated to.

**[0009]** In an preferred embodiment, the communication system is the UMTS and the downlink transport channel for PTM-M messages is the known forward access channel (FACH) or the downlink shared channel (DSCH) of the UMTS.

**[0010]** The PTM-M identifiers or the plurality of PTM-M identifiers allocated to a user terminal may be stored in a data memory of the user terminal. This allows a quick decision in the user terminal or the mobile telephone whether a detected PTM-M identifier on the paging channel is of interest to the user terminal or not. This helps to save battery power of the mobile phone as the phone is enabled to re-enter quickly into sleep mode or idle mode in which a low power consumption is attained.

**[0011]** In an preferred embodiment, the PTM-M group identifier is the international mobile group identifier used in the general packet radio system (GPRS).

**[0012]** The method of the invention comprises the following steps:

in a paging channel of the downlink channel, transmitting of paging messages in paging frames for initiating communication with a user terminal allocated to a paging group of a plurality of user terminals, in a paging indicator channel of the downlink channel, transmitting of a paging indicator allocated to

the paging group when there is a paging message for the user terminal belonging to the paging group, processing the next paging frame transmitted on the paging channel by the user terminal to see whether there is a paging message intended for it when the paging indicator has been transmitted on the paging indicator channel, and, in the paging message of the paging channel, transmitting at least one point-to-multipoint-multicast (PTM-M) group identifier to identify a PTM-M group by the network.

**[0013]** Preferably the method of the invention comprises allocating an area to a cell or to a plurality of cells by the network wherein the user terminal is in the area, and providing the paging indicator channel and the paging channel comprising the PTM-M identifier or plurality of PTM-M identifiers to the cell or to the plurality of cells of the area

**[0014]** The method may comprise, in an area serviced by the network and divided into a plurality of cells, entering one of said cells by the mobile user terminal and registering of the user terminal to be in said cell by the network of the communication system, providing of PTM-M identifiers on a downlink transport channel of the downlink channel, the information indicating the PTM-M groups being supported in said cell by the network, reading the PTM-M identifiers on the downlink transport channel by the user terminal, and comparing the PTM-M identifiers being read from the downlink transport channel with PTM-M identifiers being stored in a memory of the user terminal and indicating the PTM-M groups to which the user terminal is subscribed in order to determine the PTM-M groups being serviced in the cell for said user terminal. These steps effectively support sleep-mode operation of the user terminal or mobile phone in connection with the implementation of the PTM-M service, i.e. an effective way for saving power of the mobile phone.

**[0015]** The invention according to yet another aspect also relates to a network according to claim 12, especially for use in a communication system according to claim 1. The above preferred embodiments of the communication system also apply to the network.

**[0016]** Further, the invention relates to a user terminal, e.g. a mobile station, according to claim 13, especially for use in a communication system according to claim 1. The above preferred embodiments of the communication system also apply to the user terminal.

**[0017]** Further advantageous embodiments of the invention are mentioned in the dependent claims.

**[0018]** Further advantages, advantageous embodiments and additional applications of the invention are provided in the following description of a preferred embodiment of the invention in connection with the figures being enclosed which show:

Fig. 1 a schematic view of a communication system

according to a preferred embodiment of the invention;

Fig. 2 a schematic timing diagram showing three different downlink transport channels of the communication system of Fig. 1 in order to explain the method of the invention in connection with Fig. 3; and

Fig. 3 a schematic flow chart showing the substantial steps of the invention if a user terminal starts from sleep-mode.

**[0019]** Fig. 1 shows schematically the basic structure of a communication system according to a preferred embodiment of the invention. The communication system is a UMTS system of the latest generation which is called a 3GPP WCDMA system and which comprises a UMTS terrestrial radio access network (UTRAN) 1 as network and a plurality of terminal users 2, 3, 4, 6, 7 or mobile stations, e.g. mobile phones according to the UMTS standard, which are coupled to the UTRAN 1 via a communication channel using wireless radio frequency transmission of payload and control information or messages and having a downlink channel 8 being directed from the UTRAN 1 to the plurality of terminal users 1, 2, 3, 4, 6 to 7. A detailed explanation of the downlink channel 8 used in the shown UMTS is described, for instance, in the technical specification 3GPP TS 25.211 V3.4.0 (2000-09) "3rd Generation Partnership Project; Technical Specification Group Radio Access Network; Physical channels and mapping of transport channels onto physical channels (FDD) (Release 1999)" issued by the 3GPP Organizational Partners, which specification is incorporated herein by reference.

**[0020]** As shown in Fig. 1, the user terminals 2, 3 and 4 are in the same cell 10, whereas the user terminals 6 and 7 are in a further cell 9, each of the cells 9, 10 covering a different area or are located within the same geographical area. The user terminals 4 and 7 belong to the same PTM-M-group 5 to which a special PTM-M group identifier or corresponding control data are allocated. The PTM-M group identifier may be the known international mobile group identifier (IMGI) of the known general packet radio system (GPRS). PTM-M identifiers and corresponding IMGIs are used to implement the PTM-M service in the UMTS.

**[0021]** The downlink channel 8 of the UMTS comprises, inter alia, a paging indicator channel (PICH) 20, a paging channel 21, e.g. the secondary common control paging channel (S-CCPCH), and a further downlink transport channel 22, e.g. the downlink shared channel (DSCH) or the forward access channel (FACH).

**[0022]** In general, the paging channel 21 is a downlink transport channel that carries data relevant to the paging procedure, that is, when the network or UTRAN 1 wants to initiate communication with one of the plurality of user terminals. The simplest example is a speech call

to the user terminal. The UTRAN 1 transmits a paging message to the user terminal on the paging channel of those cells belonging to the location area that the user terminal is expected to be in. The identical paging message can be transmitted in a single cell or in up to a few hundreds of cells depending on the configuration of the UTMS.

**[0023]** The paging channel 21 is operated together with the paging indicator channel 20 to provide the user terminals with effective sleep mode operation. The paging indicator channel 20 transfers paging indicators 23 which appear periodically on the paging indicator channel 20 when there are paging messages for any of the user terminals belonging to a paging group which may comprise all user terminals of the cells 9 and 10 or only either the user terminals of the cell 9 or the user terminals of the cell 10.

**[0024]** As shown in Fig. 1, for instance, the user terminal 7 within cell 9 is a member of the paging group related to cell 9 and in addition also a member of a PTM-M group 5 corresponding to a PTM-M service and a special PTM-M group identifier 24 (see Fig. 2). Further, the user terminal 4 in the cell 10 is a member of a further paging group related to cell 10 and in addition also a member of the PTM-M group 5 corresponding to the PTM-M service and the PTM-M group identifier 24 (see Fig. 2).

**[0025]** The preferred embodiment of the method of the invention is described and explained in the following in relation to the Fig. 2 and 3.

**[0026]** For instance, the user terminal 7 has just recently entered the cell 9 (see step S1 in Fig. 3) and registration of the user terminal 7 has been accomplished by the user terminal 7 and the UTRAN 1 (see step S2). The user terminal 7 subsequently reads the PTM-M group identifier information comprising also the PTM-M group identifier 24 on a BCH downlink channel which contains the information which PTM-M groups are supported in the cell 9 (see step S3). The user terminal 7 compares (see step S4) the PTM-M group identifiers read from the BCH downlink channel with the PTM-M group identifiers being stored, for instance, in a SIM card as a memory of the user terminal 7. In the present example, the user terminal 7 or its owner is only subscribed to the PTM-M group 5 identified by the PTM-M group identifier 24 and, therefore, only the PTM-M group identifier 24 is stored in its SIM card. The user terminal 7 in the next step S5, therefore, only selects the PTM-M group identified by the PTM-M identifier 24, when it should detect the PTM-M group identifier as paging message on the paging channel 21.

**[0027]** The user terminal 7, in the following, scans the paging indicator channel 20 in order to detect a paging indicator 23. If the paging indicator channel 20 does not transport a paging indicator 23, the user terminal 7 enters the sleep mode, this step not being shown in Fig. 3.

**[0028]** Hereinafter, the illustrated embodiment relates to the case when the UTRAN 1 wants to send a PTM-M

message 25 of the PTM-M service to the user terminal 7. At first, the UTRAN 1 determines on the basis of the information stored during the registration step S2 the cell and/or the cells in which the user terminal 7 is expected to be in. In the present example, shown in Fig. 1, the UTRAN 1 finds the user terminal 7 to be in the cell 9. The UTRAN 1, then, issues periodically the paging indicator 23 on the paging indicator channel 20 and further issues a paging frame 26 comprising the PTM-M group identifier 24 as paging message on the paging channel 21, wherein the paging frame 26 has an offset value in time  $t_a$  with regard to the paging indicator 23 on the paging indicator channel 20. In addition, the UTRAN 1 outputs a PTM-M message 25 on the additional downlink transporting channel 22, the PTM-M message belonging to the PTM-M service being active.

**[0029]** Starting from the idle mode or sleep mode S9, the user terminal 7 scans periodically the paging channel 20 in order to detect a paging indicator. The user terminal detects the paging indicator 23 issued from the UTRAN 1 (step S6). In the following, the user terminal 7 scans a next paging frame 26 on the paging channel 21 after the duration  $t_a$  and detects the PTM-M group identifier 24 issued by the UTRAN 1 on the paging channel 21. The time  $t_a$  between the end of the paging indicator 23 and the beginning of the next paging frame is typically 7680 chips.

**[0030]** Subsequently, the user terminal 7 compares the detected PTM-M group identifier 24 with the PTM-M group identifier stored in its SIM card (see step S7 of Fig. 3). Provided the detected PTM-M group identifier 24 is identical to the stored PTM-M group identifier, the user terminal determines that a PTM-M message or PTM-M user data is issued belonging to the PTM-M group 5 in which it is subscribed, (see Yes after step S7 in Fig. 3). If a "No" should result after step S7, there is no PTM-M message of a PTM-M group the user terminal 7 is subscribed to and the user terminal 7 returns into its sleep mode.

**[0031]** In the case of a "Yes" after step S7 the user terminal 7 scans the downlink transporting channel 22 (see step S8) in order to detect and to read the PTM-M message 25 issued by the UTRAN 1. After processing of the PTM-M message 25, the user terminal 7 returns into its sleep mode in step S9. The user terminal S9 repeats the steps S6, S7, S8, S9 and S10 periodically.

**[0032]** As shown in Fig. 1, also the user terminal 4 is a member of the PTM-M group 5 and, therefore, it is subscribed to the corresponding PTM-M service. In order to provide the PTM-M service to the user terminal 4, the UTRAN 1 issues the paging indicator 23 on the paging indicator channel 20, the PTM-M group identifier 24 on the paging channel 21 and the PTM-M message 25 as described above with reference to the user terminal 7 and simultaneously transmits them to the user terminal 7 in the cell 10 in which the user terminal 4 is expected to be. The user terminal 4 carries out the same steps as described above with regard to the user termi-



nal 7 in order to detect and read the PTM-M message 25.

**[0033]** In case of further user terminals (not shown in the figures) or a large number of user terminals belonging to the same PTM-M group, the paging indicators 23, the PTM-M group identifier 24 and the PTM-M message 25 are output simultaneously to all user terminals belonging to the same PTM-M group regardless of whether the user terminals are within one cell or within a large number of different cells.

#### Claims

1. Communication system comprising a network and a plurality of user terminals that are coupled to the network via a communication channel using wireless radio frequency transmission and having a downlink channel for transmitting messages in the direction from the network to the user terminals, wherein the downlink channel comprises:

a paging channel for transmission of paging messages in paging frames for initiating communication with a user terminal allocated to a paging group of a plurality of user terminals, and

a paging indicator channel for transmission of a paging indicator belonging to said paging group, in case there is a paging message for the user terminal belonging to said paging group, wherein the user terminal processes the next paging frame transmitted on the paging channel to determine whether there is a paging message intended for the user when the paging indicator has been transmitted on the paging indicator channel, and

wherein the paging message on the paging channel comprises a point-to-multipoint-multicast (PTM-M) group identifier to identify a PTM-M group.

2. Communication system according to claim 1, wherein the paging message on the paging channel comprises one or a plurality of PTM-M messages being intended for the PTM-M group and identified by means of the PTM-M group identifier.

3. Communication system according to claim 1, wherein the downlink channel comprises in addition a downlink transport channel shared by several user terminals and intended to transport PTM-M messages, wherein the user terminal accesses the PTM-M messages of the downlink transport channel when, in the paging channel, the user terminal has detected a PTM-M identifier of a PTM-M group to which the user terminal is allocated to.

4. Communication system according to claim 3, wherein the communication system is the UMTS and the downlink transport channel is the forward access channel (FACH) of the UMTS.

5. Communication system according to claim 3, wherein the communication system is the UMTS and the downlink transport channel is the downlink shared channel (DSCH) of the UMTS.

6. Communication system according to one of the preceding claims, wherein an area is allocated to a cell or to a plurality of cells, wherein the user terminal is located in that area, the network transmitting the paging indicator channel and the paging channel comprising the PTM-M identifier or a plurality of PTM-M identifiers to the cell or to the plurality of cells of the area.

7. Communication system according to one of the preceding claims, wherein the PTM-M identifier or the plurality of PTM-M identifiers allocated to the user terminal are stored in a data memory of the user terminal.

8. Communication system according to claim 7, wherein the data memory is a memory in a SIM card of the user terminal.

9. Communication system according to one of the preceding claims, wherein the communication system is the Universal Mobile Telecommunication System (UMTS), wherein the network is the UMTS Terrestrial Radio Access network and wherein the user terminal is an UMTS terminal or an UMTS mobile phone.

10. Communication system according to one of the preceding claims, wherein the communication system is the UMTS and the paging channel is the secondary common control physical channel (S-CCPCH) of the UMTS.

11. Communication system according to one of the preceding claims, wherein the PTM-M group identifier is the international mobile group identifier used in the general packet radio system (GPRS).

12. Network, adapted to communicate with a plurality of user terminals that are coupled to the network via a communication channel using wireless radio frequency transmission and having a downlink channel for transmitting messages in the direction from the network to the user terminals, wherein the downlink channel comprises:

a paging channel for transmission of paging messages in paging frames for initiating com-

munication with a user terminal allocated to a  
 paging group of a plurality of user terminals,  
 and  
 a paging indicator channel for transmission of  
 a paging indicator belonging to said paging 5  
 group, in case there is a paging message for the  
 user terminal belonging to the paging group,  
 and wherein the paging message on the paging  
 channel comprises a point-to-multipoint-multi-  
 cast (PTM-M) group identifier to identify a 10  
 PTM-M group.

13. User terminal, adapted to communicate with a net-  
 work, comprising a mobile station including recep-  
 tion means adapted for receiving messages from 15  
 the network in a downlink channel; wherein said  
 downlink channel comprises :

a paging channel for reception of paging mes-  
 sages in paging frames for initiating communi- 20  
 cation with said network, the user terminal be-  
 ing adapted to be allocated to a paging group  
 comprising a plurality of user terminals, and  
 a paging indicator channel for reception of a  
 paging indicator belonging to said paging 25  
 group, in case there is a paging message for the  
 user terminal belonging to said paging group,  
 wherein the user terminal processes the next  
 paging frame received on the paging channel  
 to determine whether there is a paging mes- 30  
 sage intended for the user when the paging in-  
 dicator has been transmitted on the paging in-  
 dicator channel, and  
 wherein the paging message on the paging  
 channel comprises a point-to-multipoint-multi- 35  
 cast (PTM-M) group identifier to identify a  
 PTM-M group.

14. Method for operation of a communication system  
 comprising a network and a plurality of user termi- 40  
 nals that are coupled to the network via a commu-  
 nication channel using wireless radio frequency  
 transmission and having a downlink channel for  
 transmitting messages in the direction from the net-  
 work to the user terminals, wherein the method 45  
 comprises:

in a paging channel of the downlink channel,  
 transmitting of paging messages in paging  
 frames for initiating communication with a user 50  
 terminal allocated to a paging group of a plural-  
 ity of user terminals,  
 in a paging indicator channel of the downlink  
 channel, transmitting of a paging indicator allo-  
 cated to the paging group, in case there is a 55  
 paging message for the user terminal belong-  
 ing to the paging group,  
 processing of the next paging frame transmit-

ted on the paging channel by the user terminal  
 to determine whether there is a paging mes-  
 sage intended for the user when the paging in-  
 dicator has been transmitted on the paging in-  
 dicator channel, and,  
 in the paging message of the paging channel,  
 transmitting at least one point-to-multipoint-  
 multicast (PTM-M) group identifier to identify a  
 PTM-M group by the network.

15. Method according to claim 14, wherein the paging  
 message on the paging channel comprises a  
 PTM-M message being intended for the PTM-M  
 group which is identified by means of the PTM-M  
 group identifier.

16. Method according to claim 15, the method compris-  
 ing:

in the downlink channel, providing in addition a  
 downlink transport channel shared by several  
 user terminals and intended for transporting  
 PTM-M messages, the user terminal accessing  
 the PTM-M messages of the downlink transport  
 channel when, in the paging channel, the user  
 terminal has detected a PTM-M identifier of a  
 PTM-M group to which the user terminal is al-  
 located to.

17. Method according to one of the claims 14 to 16, the  
 method comprising:

allocating an area to a cell or to a plurality of  
 cells by the network, wherein the user terminal  
 is in that area, and providing the paging indica-  
 tor channel and the paging channel comprising  
 the PTM-M identifier or plurality of PTM-M iden-  
 tifiers to the cell or to the plurality of cells of the  
 area.

18. Method according to one of the claims 14 to 17, the  
 method comprising:

storing of the PTM-M identifier or the plurality  
 of PTM-M identifiers allocated to the user ter-  
 minal in a data memory of the user terminal.

19. Method according to one of the claims 14 to 18, the  
 method comprising:

in an area serviced by the network and divided  
 into a plurality of cells, entering one of said cells  
 by the mobile user terminal and  
 registering of the user terminal to be in said cell  
 by the network of the communication system,  
 providing of PTM-M identifiers on a downlink  
 transport channel of the downlink channel, the  
 information indicating the PTM-M groups being

supported in said cell by the network,  
 reading the PTM-M identifiers on the downlink  
 transport channel by the user terminal, and  
 comparing the PTM-M identifiers being read  
 from the downlink transport channel with 5  
 PTM-M identifiers being stored in a memory of  
 the user terminal and indicating the PTM-M  
 groups to which the user terminal is subscribed  
 in order to determine the PTM-M groups being  
 serviced in the cell for said user terminal. 10

20. Method according to one of the claims 14 to 19, the  
 method comprising:

periodically detecting and reading of the paging 15  
 indicators on the paging indicator channel by  
 the user terminal.

21. Method according to claim 20, the method compris-  
 ing: 20

next, in case a paging indicator is detected on  
 the paging channel, reading of the paging mes-  
 sage on the paging channel which is allocated  
 to the paging indicator. 25

22. Method according to claim 20, the method compris-  
 ing:

next, in case a PTM-M identifier is detected by 30  
 the user terminal in the paging message on the  
 paging channel, comparing the detected  
 PTM-M identifier to the PTM-M identifier or the  
 PTM-M-identifiers stored in the user terminal. 35

23. Method according to claim 22, the method compris-  
 ing:

next, in case the detected PTM-M identifier cor-  
 responds to one of the PTM-M identifiers being 40  
 stored in user terminal, reading of PTM-M mes-  
 sages belonging to a PTM-M-group identified  
 by the PTM-M-identifier on a downlink transport  
 channel of the downlink channel. 45

24. Method according to claim 20, wherein the user ter-  
 minal is in a sleep-mode between the steps of pe-  
 riodically detecting and reading of the paging indi-  
 cators. 50

55

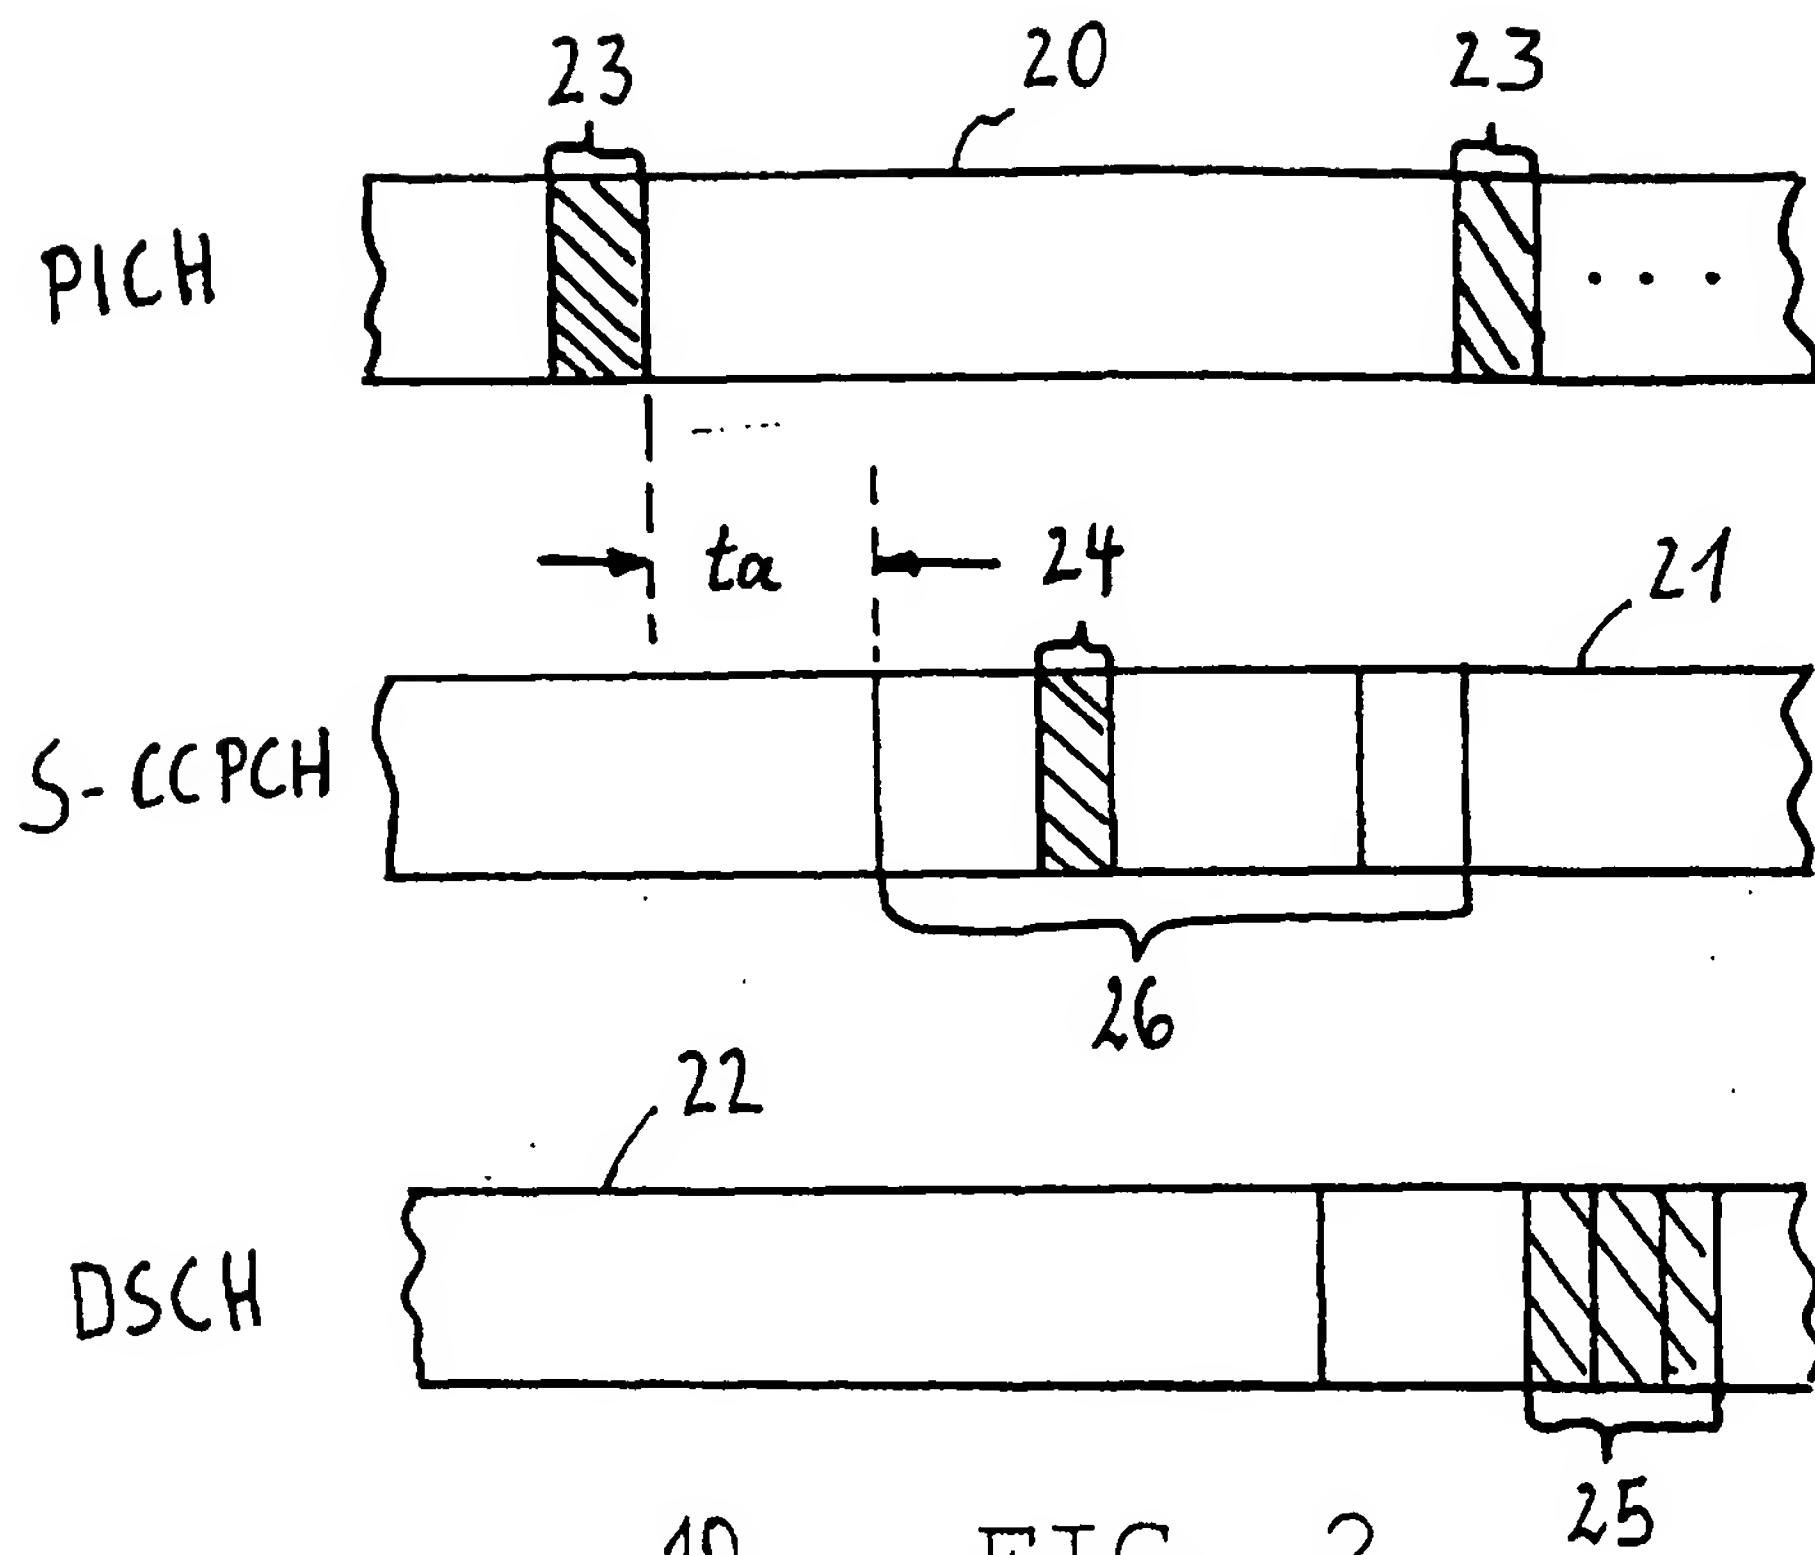


FIG. 2

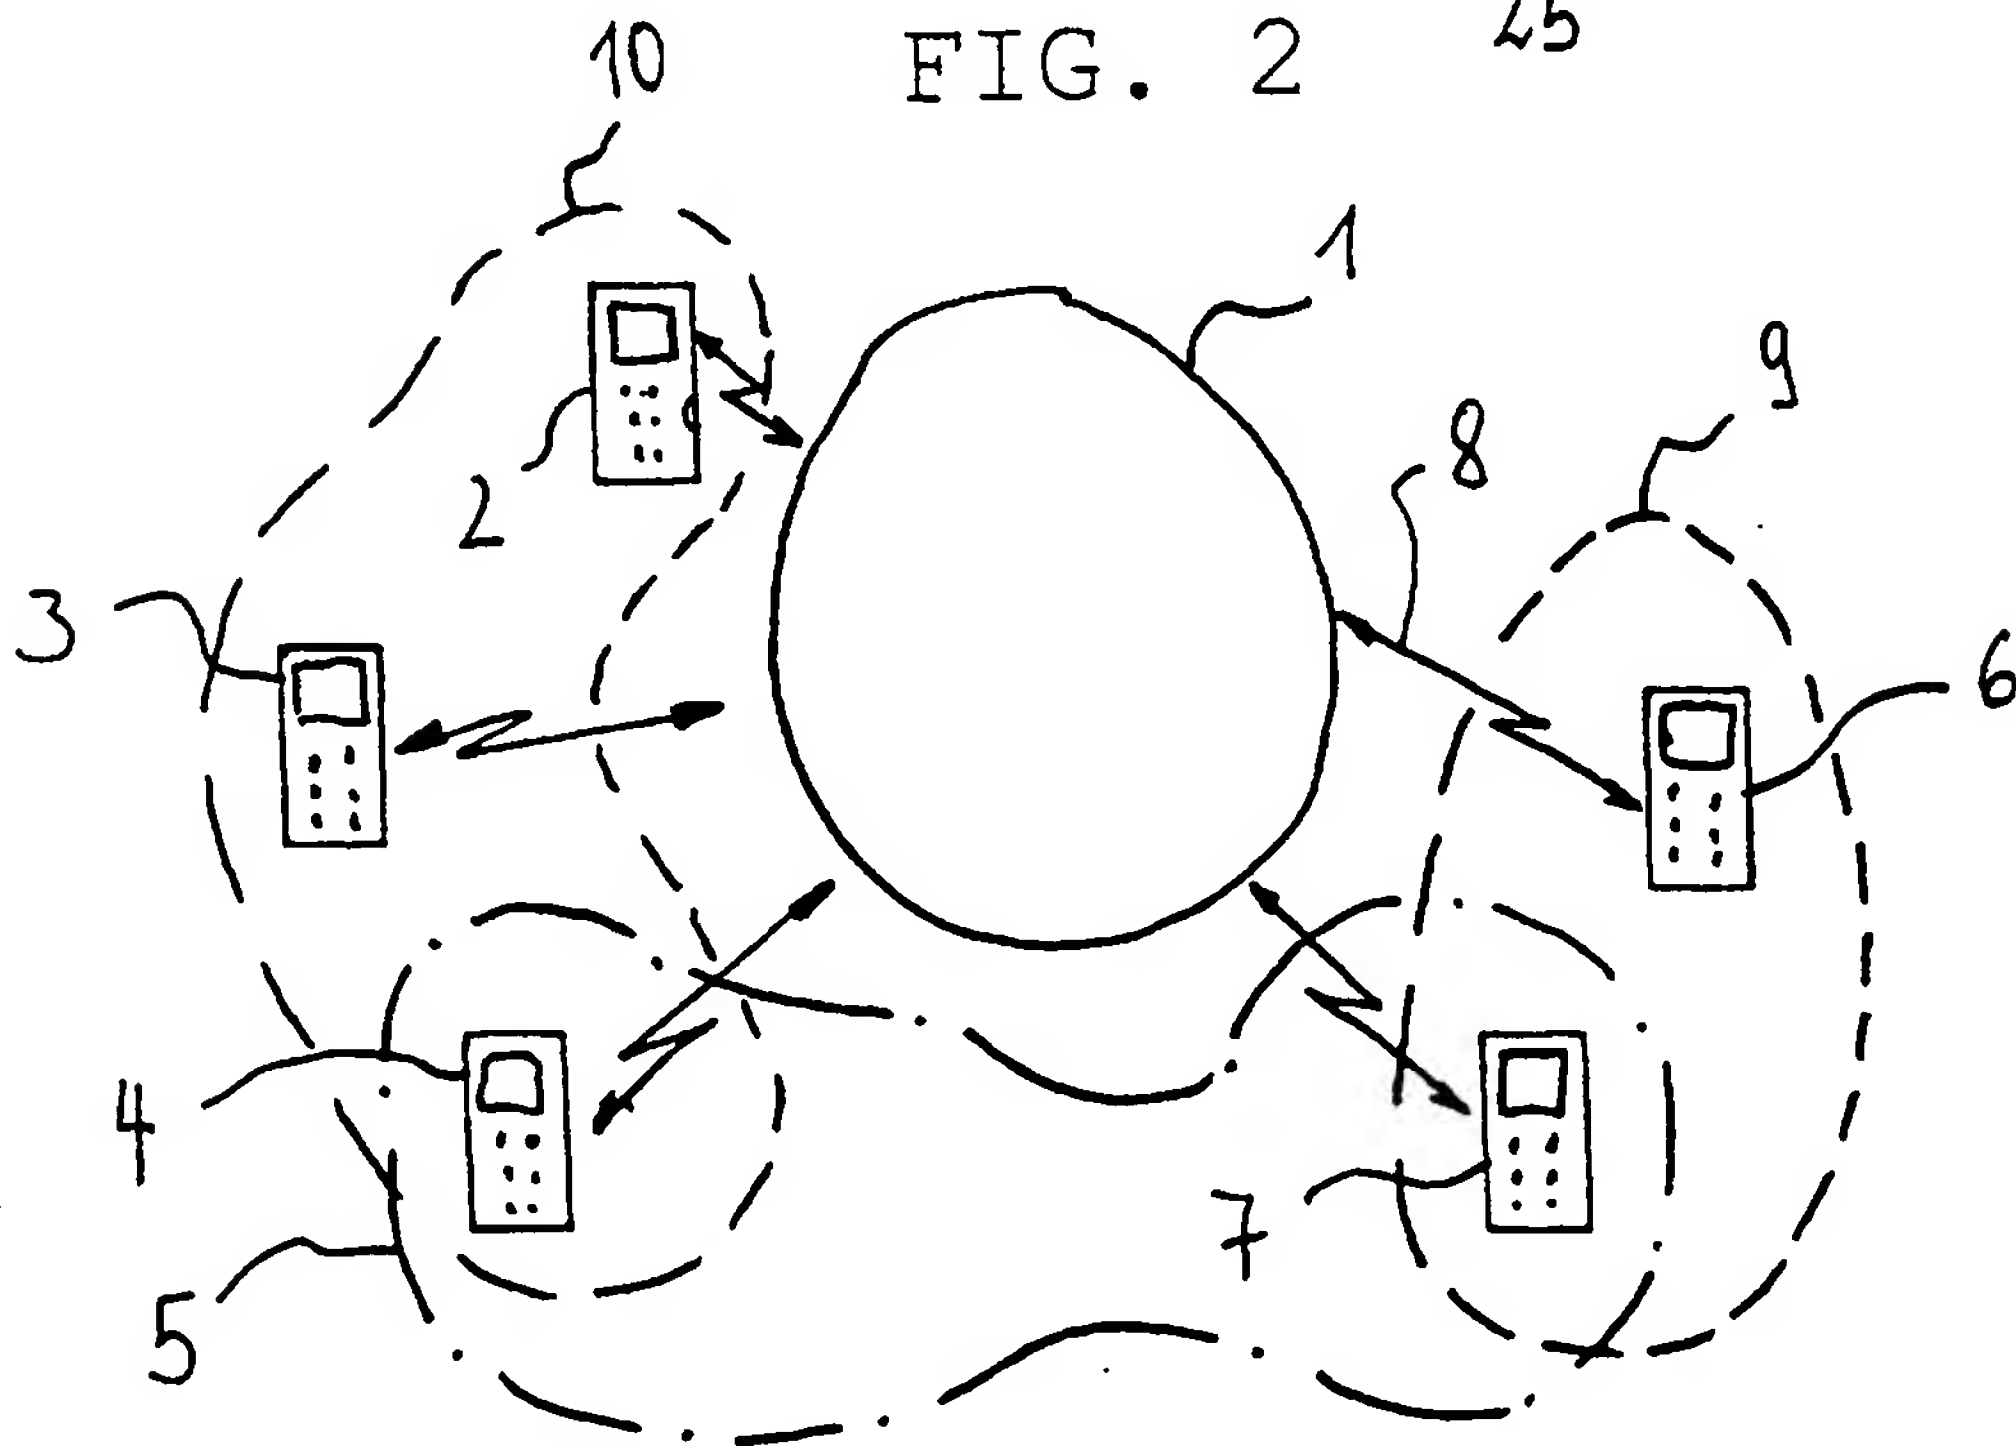


FIG. 1



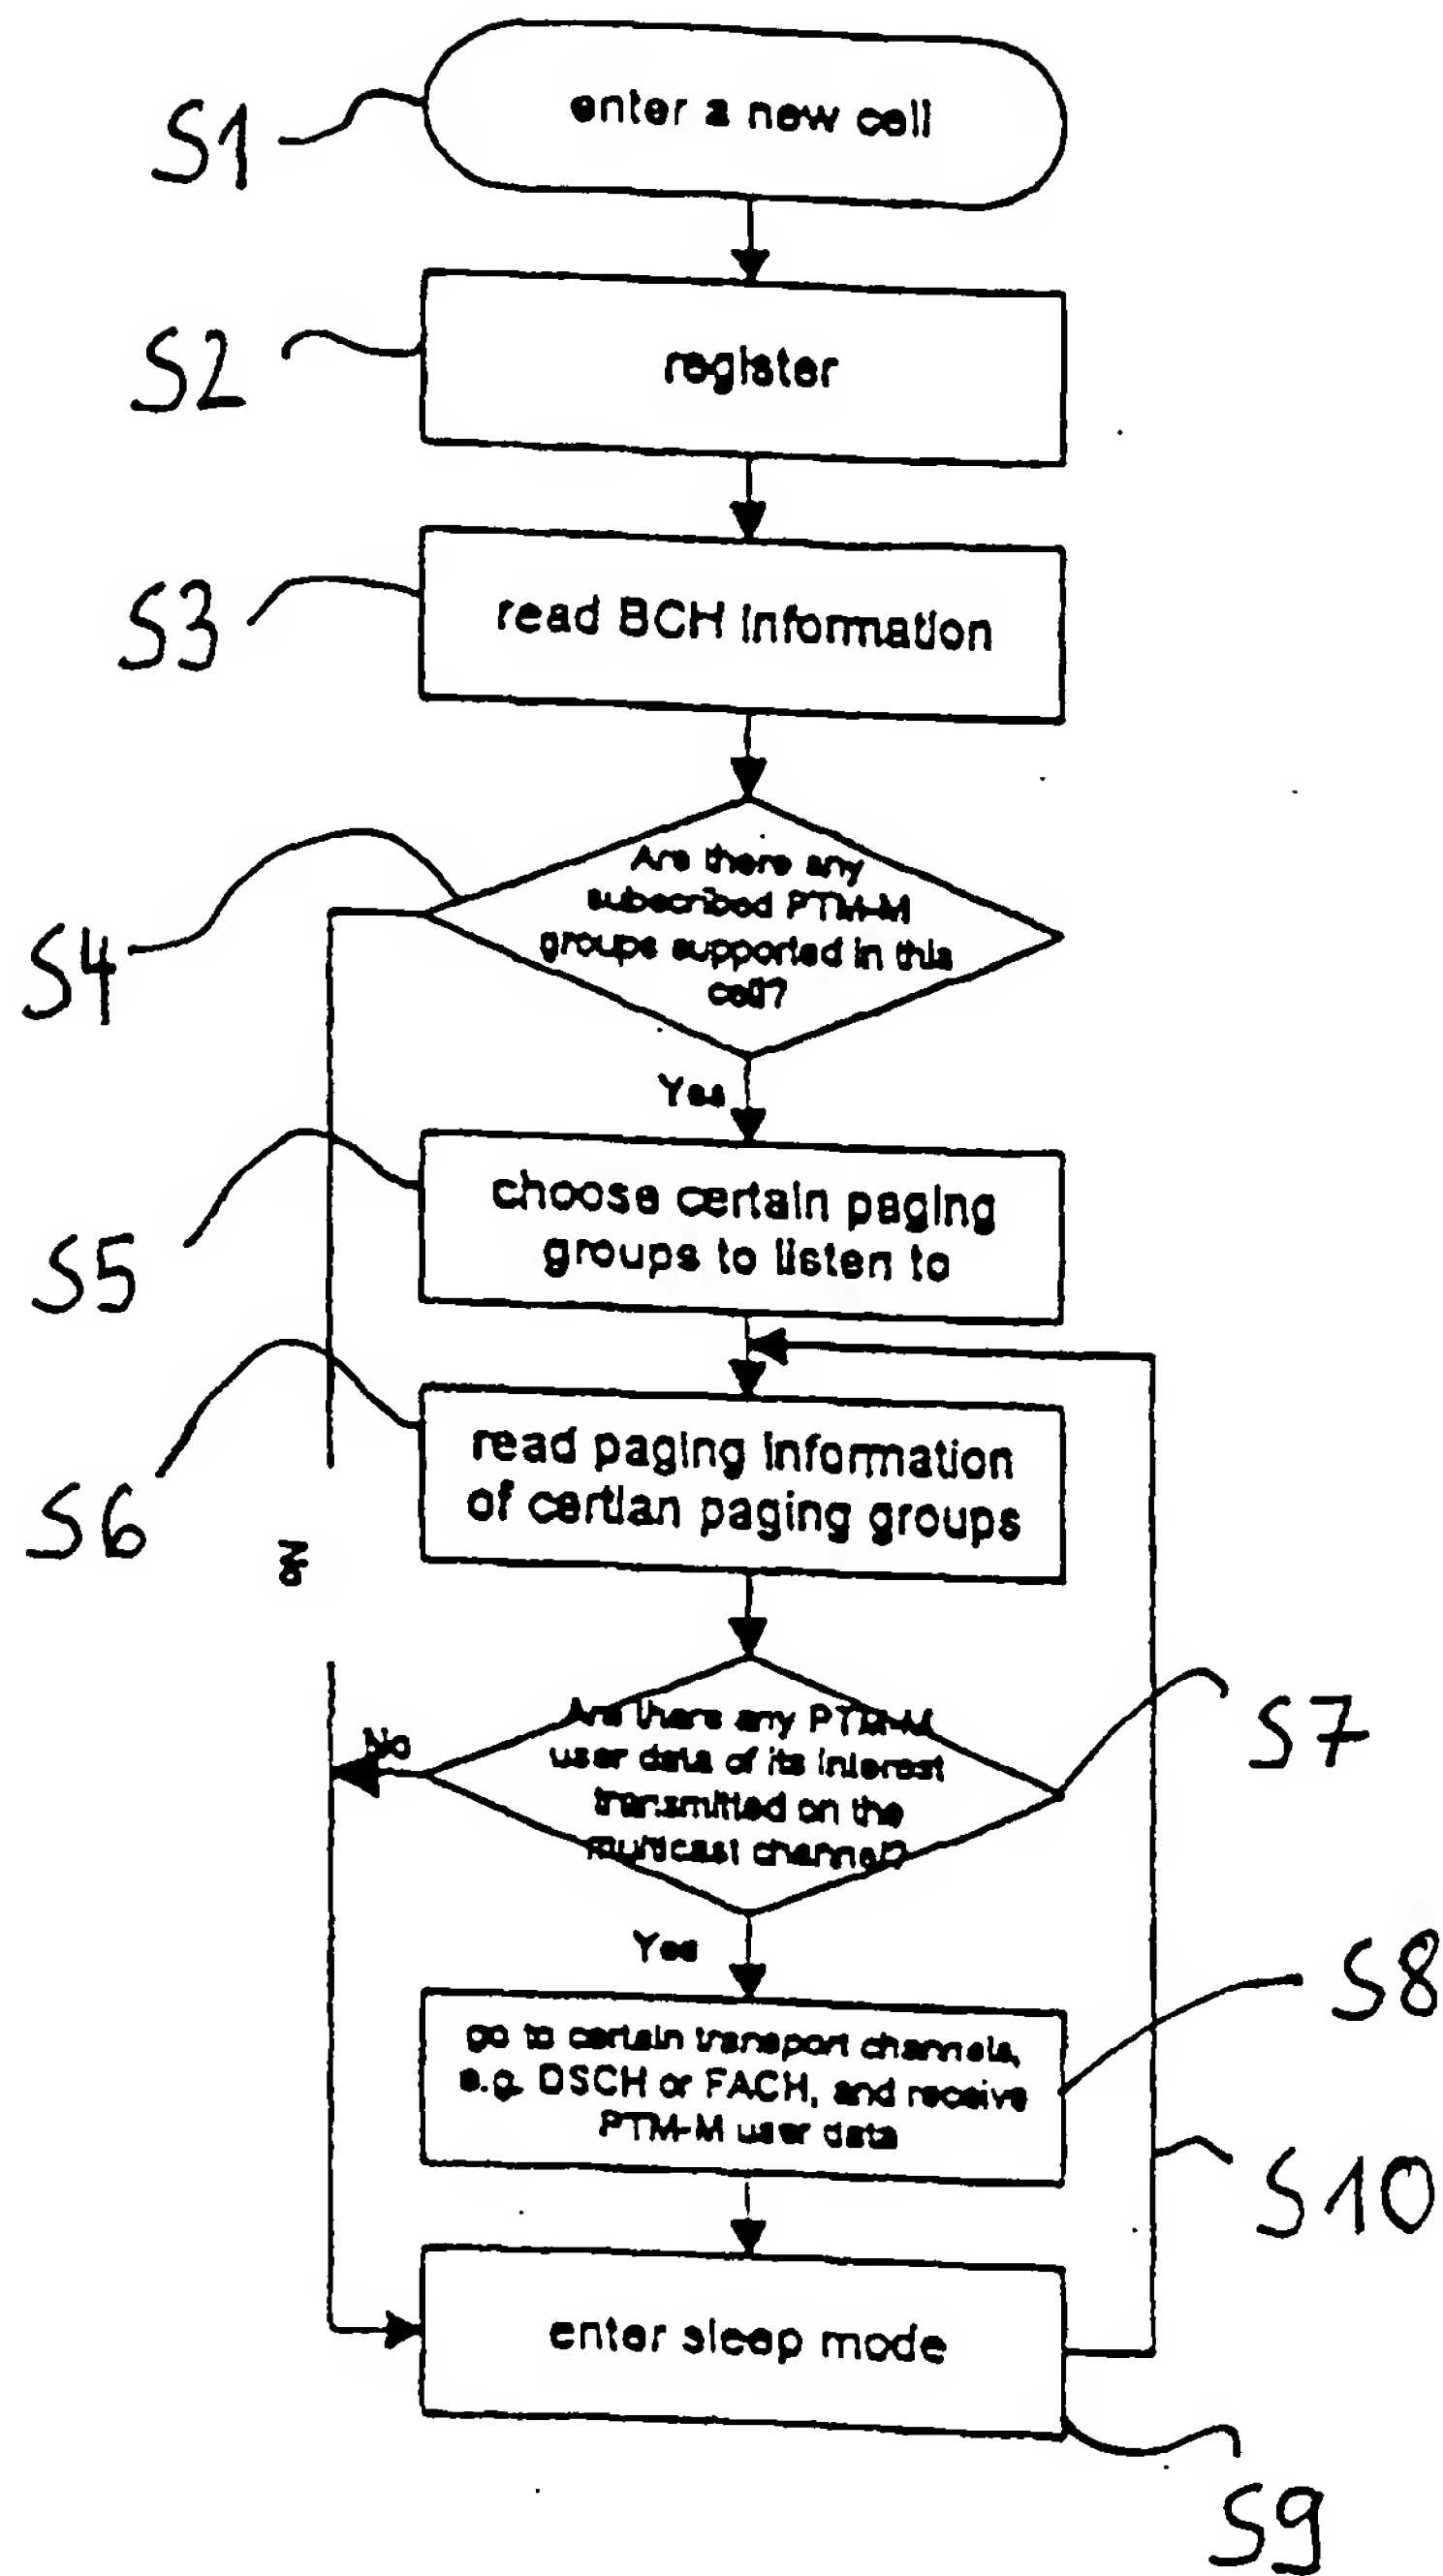


FIG. 3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 12 6969

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 00 52948 A (ERICSSON TELEFON AB L M) 8 September 2000 (2000-09-08)	1-4,6,9, 12-17, 20,21,24	H04Q7/38
Y	* page 10, line 11 - line 27 *	5,7,8, 10,11, 18,19, 22,23	
	* page 11, line 8 - line 15 *		
	* page 12, line 19 - page 13, line 3 *		
	* page 13, line 11 - line 17 *		
	* page 13, line 26 - page 14, line 11 *		
	* page 15, line 25 - line 27 *		
	* page 16, line 2 - line 4 *		
	* page 16, line 15 - line 25 *		
	---		
Y	WO 99 57927 A (ERICSSON INC) 11 November 1999 (1999-11-11)	7,8,18, 19,22,23	
	* page 1, line 6 - line 8 *		
	* page 4, line 25 - page 5, line 6 *		
	* page 6, line 10 - line 17 *		
	---		
A,D	"UNIVERSAL MOBILE TELECOMMUNICATIONS SYSTEM (UMTS); PHYSICAL CHANNELS AND MAPPING OF TRANSPORT CHANNELS ONTO PHYSICAL CHANNELS (FDD) (3GPP TS 25.211 VERSION 3.4.0 RELEASE 1999)" ETSI TS 125 211 V3.4.0 (2000-09) TECHNICAL SPECIFICATION, September 2000 (2000-09), pages 1-42, XP002168076 SOPHIA ANTIPOLIS, FRANCE	1-4,6,9, 12-17, 19-24	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04Q
Y	* page 8, line 4 - line 26 *	5,10	
	* page 26, line 3 - line 20 *		
	* page 33, line 11 - page 34, line 13 *		
	* page 36, line 3 - line 7 *		
	* figure 26 *		
	---		
	-/---		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 31 May 2001	Examiner Heinrich, D
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (F04C01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 12 6969

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	WO 98 25422 A (NOKIA TELECOMMUNICATIONS OY ; HAUMONT SERGE (FI)) 11 June 1998 (1998-06-11)	1-3, 6, 7, 9, 12-19, 22, 23	
Y	* page 3, line 12 - line 31 * * page 4, line 13 - line 29 *	11	
E	WO 01 03460 A (SOMMER VOLKER ; ULRICH THOMAS (DE); KOEHN REINHARD (DE); PURAT MARC) 11 January 2001 (2001-01-11) * page 3, line 21 - line 30 * * page 7, line 26 - page 8, line 17 * * page 10, line 11 - line 24 * * page 11, line 17 - line 28 *	1-24	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>31 May 2001</b>	Examiner <b>Heinrich, D</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (F04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 12 6969

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

31-05-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0052948 A	08-09-2000	AU 3686600 A	21-09-2000
WO 9957927 A	11-11-1999	US 6175743 B	16-01-2001
		AU 3782399 A	23-11-1999
		BR 9910105 A	26-12-2000
WO 9825422 A	11-06-1998	FI 964818 A	03-06-1998
		AU 5123398 A	29-06-1998
		EP 0947114 A	06-10-1999
WO 0103460 A	11-01-2001	DE 19931130 A	18-01-2001

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82